


Energex™ Impact Products from Deceuninck®

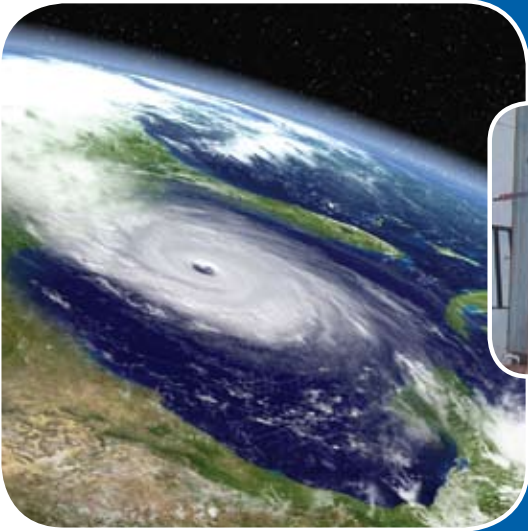

We can't control the weather – but we can help you weather any storm with impact rated Energex window and door solutions.

During high wind events, window failure can lead to devastating consequences, from water damage to total structural failure, as winds enter the building and amplify the pressure on the roof. Minimize your risk with Energex impact window and door solutions, engineered to meet coastal building code requirements, up to and including the specifications of ASTM E 1886-02 and ASTM E 1996-02, Wind Zone 4.

Innovating solutions for
the environments of your life.™


deceuninck®

PERFORMANCE

Our AAMA certified product line includes single and double hungs, casements and picture windows, as well as sliding patio doors.

Energex hurricane-resistant windows and doors:

- Have been tested and have passed the large missile impact standard
- Feature patent pending hardware
- Offer maintenance free, limited lifetime warranted SunShield® vinyl compound and Solex® laminate

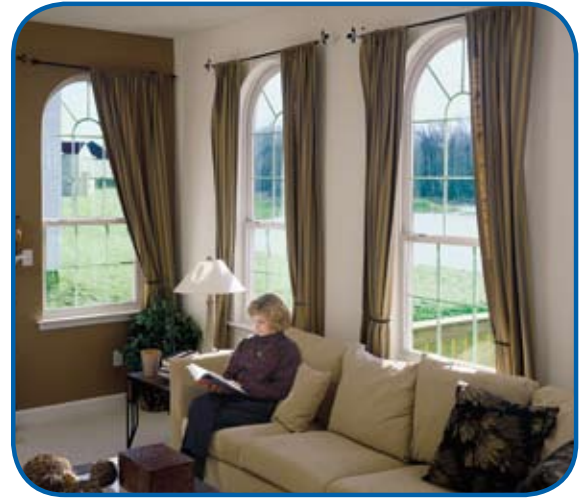

Single Hung	Double Hung	Casement	Picture Window	Sliding Patio Door
<p>Size: 48"x 72" with Nail Fin Installation 54"x 72" with Flange Installation Hardware: DNA Patent Pending IG Unit: 3/4" Overall Thickness DS/.090 PVBInterlayer/DS DS Sacrificial</p>	<p>Size: 48"x 72" with Nail Fin or Flange Installation Hardware: DNA Patent Pending IG Unit: 3/4" Overall Thickness DS/.090 PVBInterlayer/DS DS Sacrificial</p>	<p>Size: 37"x 75" with Nail Fin or Flange Installation Hardware: DNA Patent Pending Truth Maxim Operator and Lock System IG Unit: 3/4" Overall Thickness DS/.090 PVBInterlayer/DS DS Sacrificial Passed AAMA DP 50 Passed Water Test at DP 65</p>	<p>Size: 64"x 84" with Nail Fin or Flange Installation & 1-1/4" IG 48"x 63" with Nail Fin or Flange Installation & 3/4" IG IG Unit: 1-1/4"- 3/16" .075 Rigid Interlayer/3/16" and 3/16" Sacrificial 3/4"- DS/.090 PVB Interlayer/DS and DS Sacrificial</p>	<p>Size: 16'0"x 8'0" with Nail Fin Installation Hardware: Multi Point Locking System IG Unit: 1" Overall Thickness DS/.090 PVB Interlayer/DS 3/16" Sacrificial</p>

For more information

Call 1.877.563.4251 or visit www.deceuninck-americas.com



The name and logo of Deceuninck NV, of its affiliated companies and of the products and services manufactured by them, are trademarks and trade names protected by national and international laws. Energex is a trademark of Deceuninck North America, LLC.

© 2008 Deceuninck North America. All rights reserved. FEN-100 0109

deceuninck®